

A young child with red hair, wearing a red jacket and blue jeans, is sitting on a red toy car with yellow wheels and a yellow steering wheel. The child is looking to the right. The room has light-colored wood-grain vinyl plank flooring. In the background, there is a light gray sofa, a white coffee table, a large window with a view of a blue sky and green trees, a tall black floor lamp with a wooden pole, and a large green plant in a white pot.

LUXURY
VINYL PLANK
SPC FLOORING



Color: MY0143-3

Company Profile

Haining Mingyuan Decorative Materials CO., LTD. is a professional engaged in the research, development, sale, and service of SPC Flooring. It's based on advanced and professional machines for production, shaped by the processing from floor extrusion, UV coating, slotting, and under backing pad to inspection and packaging, controlling the product quality strictly for every process.

It is located in Shuangfeng industrial zone, Haining City, Zhejiang province, and covers an area of 10000 square meters, a beautiful environment, and excellent geographical conditions. The company has independent import & export rights, products are exported to European, America, Southeast Asia, South America, and other countries. We adhere to product design and high-quality standards to provide quality products to consumers. In the energy shortage, environmental pollution is serious today, we take green environmental production as a concept.





QUALITY CERTIFICATION

权威认证 品质值得信赖



ISO9001

ISO 9001 is a quality management system standard developed by the International Organization for Standardization to help organizations improve the quality of products and services to meet customer needs and expectations. By implementing ISO 9001, organizations can improve work efficiency, reduce costs, enhance customer satisfaction, and gain a competitive advantage in the international marketplace.



FLOOR SCORE

FLOOR SCORE is an environmental certification program for flooring products that assesses their impact on indoor air quality. By obtaining certification, flooring products can demonstrate that they meet stringent environmental standards, helping consumers choose healthier, environmentally friendly flooring. The certification also promotes sustainability and environmental protection in the flooring industry.



CE

CE certification is a product safety compliance certification in the European market, indicating that the product meets the relevant safety, health and environmental standards in Europe, and can be sold and circulated in the European market.



GREEN GUARD

GREENGUARD certification is a certification for indoor air quality by testing and monitoring volatile organic compounds in products to ensure that they do not release chemicals that are harmful to human health. Products with this certification can be used with confidence and are more friendly to indoor environments and sensitive people.




SGS

SGS Certification is a certification service provided by the SGS Group to verify that products comply with international standards and regulations. SGS certified products have a higher degree of trust and market competitiveness.



SPC Flooring Structure

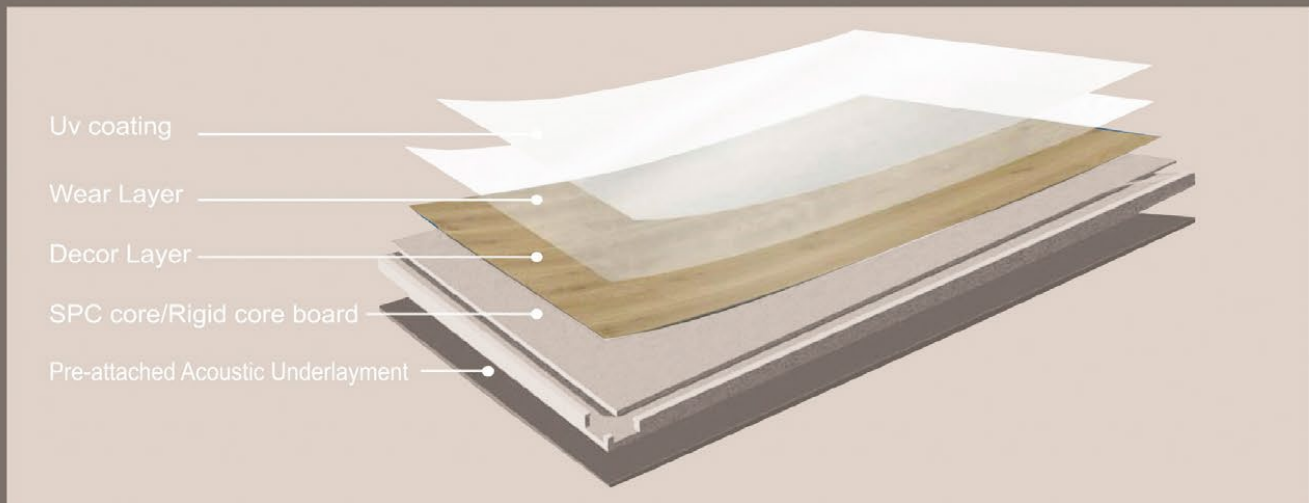

SPC FLOORING

SPC flooring is moisture-proof, anti-mildew, anti-bacterial, and has zero formaldehyde, making your house environment healthier and safer. Our SPC flooring is specially designed with an international click lock system and is easy to install and maintain. We promise that we will control the product's appearance, dimension characteristics, deviation requirements, and physical character in every order according to international inspecting items standards. We adhere to bringing the best decoration experience to the customers all the time.

QPC FLOORING


Mingyuan Flooring developed and created QPC flooring (Quartz Plastic Core), which is a more and more popular super durable resistant vinyl flooring in a new style environment. It's made of poly materials, shaped by the processing of extrusion, and special uniquely super durable paint and quartz materials for UV coating on the surface. Combining all the great qualities of SPC but with more durability and scratch resistance, better overall clarity for dent and gouge resistance, superior resist burn and fireproof, especially for preventing smoke leaves and burn marks, superior for anti-fouling and waterproof. Fireproofing grade reached EN Class. .. Bf1-S1 and wear scratch resisting reached Class AC5.





Technical Data


Products Data		
Vinyl Flooring Tile Dimension	6" x 36", 7" x 48", 9" x 48", 9" x 54", 9" x 60", 9" x 72" or Customized	
Thickness	3.5mm-8mm	
Wear Layer Thickness	8mil, 12mil, 20mil, 22mil (0.2mm, 0.3mm, 0.5mm, 0.7mm)	
Surface Texture	Deep / Light Embossed Wood / Marble	
Safety Criteria	Standard	Value
Flammability	EN13501-1	Bf1
Slip Resistance	EN13893	DS
Formaldehyde Emission	EN717-1	None
Castor Wheel Tes	EN425	Pass
Color Fastnesst	ISO105-BO2	≥6
Determination of Migration of Heavy	EN71	None
Metals Performance	Standard	Value
Wear Resistance	EN-660-2	≤0.015g
Flexibility	EN435	No damage
Curling After Exposure To Heat	EN434	≤1.2mm(80°C,6hrs)
Peel Resistance	EN431	≥2.8Kgf/cm2
Dimensional Stability	EN434	≤0.08%(80°C,6hrs)
Residual Indentation	EN434	≤0.1mm


Accessories


	T-Molding
	Size: 2400x48x9mm
	Packing: 20 pcs/ctn
	Weight: 0.32 kg/m

	7 End-Cap
	Size: 2400x22.5x6.5mm
	Packing: 50 pcs/ctn
	Weight: 0.1 kg/m


	End-Cap
	Size: 2400x35x10mm
	Packing: 20 pcs/ctn
	Weight: 0.29 kg/m

	Reducer
	Size: 2400x45x11mm
	Packing: 20pcs/ctn
	Weight: 0.41 kg/m

	Stair Nose-54
	Size: 2400x54x18mm
	Packing 20 pcs/ctn
	Weight: 0.46 kg/m

	Stair Nose-110
	Size: 2400x110x25mm
	Packing: 8 pcs/ctn
	Weight: 1 kg/m


	Skirting
	Size : 2400x80x12mm
	Packing: 15 pcs/ctn
	Weight: 0.68 kg/m

	Quarter Round
	size 2400x28x17mm
	Packing: 20 pcs/ctn
	Weight: 0.28 kg/m


Customize Your Configuration



Color: MY0280-1




Color: MY0901-2

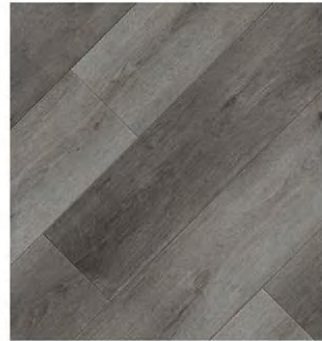

Color: MY0260-1



Color: MY0123-13



Color: MY0180-6



Color: MY0142-4




Color: MY0142-22




Color: MY0143-10




Color: MY0131-5



Color: MY02002-5



Color: MY0117-3



Color: MY0468-1



100% Recyclable



Impact resistance



Uv Coating



Click system



Insect prevention



Easy to clean and maintain



Sound absorption and noise prevention



Safety and anti-slip



Scratch resistant



Easy to install



Color: MY1282-2



Color: MY0130-5



Color: MY0166-9



Color: MY0143-3



Color: MY0143-5



Color: MY0143-2



Color: MY135-26



Color: MY0501-01



Color: MY0185-1



Pregnancy and infant safety



Waterproof



Antibacterial function



Wear resistant



Fire-Retardant



Durability



Stable Structure



Eco friendly

New materials , New technologies —No formaldehyde



Green Environmental / No Heavy Metal

The main raw material for producing SPC flooring is a natural stone powder that is tested by the national authoritative department and does not contain any radioactive elements. It is an environmentally friendly and non-toxic renewable resource, 100% free of formaldehyde, lead, and benzene, with no heavy metals, and carcinogens. Soluble volatiles, no radiation, truly natural and environmentally friendly. The SPC floor is a reusable floor material that is important for protecting our planet's natural resources and ecological environment.

100% Waterproof / Moistureproof

Waterproofing is the biggest advantage of SPC flooring. Distinct from ordinary laminate floors, SPC and water have no affinity, and no mildew due to high humidity. Even under high humidity conditions, it won't warp or rot. Bacteria will not propagate on the SPC floor. Areas with high humidity are a good choice for the SPC floor.

Anti-UV

UV coating not only has superior UV protection, but also has anti-corrosion, waterproof, heat insulation, thermal insulation and other effect. Significantly lower surface temperature: up to 95% radiant heat can be controlled. When the coating is applied to a thickness of 20 mils, the ceramic thermal barrier will reduce the surface temperature by 61 to 82 degrees Fahrenheit (i.e.15.4-26.8°C). Additional coating can reduce the temperature by 30 to 40 degrees Fahrenheit.

Prevent Scraping / Wear Resistant

On the surface of the SPC floor, there is a special transparent and wear-resistant PVC layer. Which help the SPC floor's abrasion revolution up to 30000. The super strong wear-resistant layer with special surface treatment fully guarantees the excellent ground material's wear resistance. The wearable layer of stone plastic floor surface can be used for 5-10 years under normal conditions according to the thickness.

Haining Mingyuan Decorative Materials CO., LTD.

Add: NO.2 Weiye Road, No.3 Shuangfeng industrial park, Yuanhua Town, Haining City, Zhejiang province, China

Website: www.mayerfloor.com